

# Product data sheet

Specifications



variable speed drive, Altivar Process ATV900, ATV930, 132kW, 380 to 480V, with braking unit, IP20

ATV930C13N4

## Main

Range Of Product	Altivar Process ATV900
Device Application	Industrial application
Product Or Component Type	Variable speed drive
Product Destination	Synchronous motors Asynchronous motors
Product Specific Application	Process for industrial
Variant	Standard version With braking chopper
Network Number Of Phases	3 phases Single phase
Mounting Mode	Wall mount
Communication Port Protocol	Ethernet IP/Modbus TCP Modbus
[Us] Rated Supply Voltage	380...480 V - 15...10 %
Motor Power Kw	132.0 kW normal duty 110.0 kW heavy duty
Continuous Output Current	250 A 4 kHz normal duty 211 A 4 kHz heavy duty
Emc Filter	Integrated With EMC plate option
Ip Degree Of Protection	IP21
Degree Of Protection	UL type 1
Option Module	Slot A communication module Profibus DP V1 Slot A communication module PROFINET Slot A communication module DeviceNet Slot A communication module EtherCAT Slot A communication module CANopen daisy chain RJ45 Slot A communication module CANopen SUB-D 9 Slot A communication module CANopen screw terminals Slot A/slot B/slot C digital and analog I/O extension module Slot A/slot B/slot C output relay extension module Slot B 5/12 V digital encoder interface module Slot B analog encoder interface module Slot B resolver encoder interface module
Asynchronous Motor Control Profile	Constant torque standard Variable torque standard Optimized torque mode
Synchronous Motor Control Profile	Permanent magnet motor Synchronous reluctance motor
Maximum Output Frequency	599 Hz
Switching Frequency	1...8 kHz adjustable 2.5...8 kHz with derating factor

<b>Nominal Switching Frequency</b>	2.5 kHz
<b>Line Current</b>	237.0 A 380 V normal duty) 201.0 A 380 V heavy duty) 213.0 A 480 V normal duty) 165.0 A 480 V heavy duty)
<b>Apparent Power</b>	161.4 kVA 380...480 V normal duty) 121.8 kVA 380...480 V heavy duty)
<b>Maximum Transient Current</b>	300 A 60 s normal duty) 317 A 60 s heavy duty)
<b>Network Frequency</b>	50...60 Hz
<b>Prospective Line Isc</b>	50 kA

## Complementary

<b>Discrete Input Number</b>	10
<b>Relay Output Type</b>	Configurable relay logic R1 fault relay NO/NC 100000 cycles Configurable relay logic R2 sequence relay NO 1000000 cycles Configurable relay logic R3 sequence relay NO 1000000 cycles
<b>Physical Interface</b>	Ethernet 2-wire RS 485
<b>Connector Type</b>	2 RJ45 1 RJ45
<b>Method Of Access</b>	Slave Modbus TCP
<b>Transmission Rate</b>	10, 100 Mbits 4.8 kbps 9600 bit/s 19200 bit/s
<b>Transmission Frame</b>	RTU
<b>Number Of Addresses</b>	1...247
<b>Data Format</b>	8 bits, configurable odd, even or no parity
<b>Type Of Polarization</b>	No impedance
<b>4 Quadrant Operation Possible</b>	True
<b>Acceleration And Deceleration Ramps</b>	Linear adjustable separately from 0.01...9999 s S, U or customized
<b>Motor Slip Compensation</b>	Adjustable Automatic whatever the load Can be suppressed Not available in permanent magnet motor law
<b>Braking To Standstill</b>	By DC injection
<b>Brake Chopper Integrated</b>	True
<b>Maximum Input Current</b>	237.0 A
<b>Maximum Output Voltage</b>	480.0 V
<b>Relative Symmetric Network Frequency Tolerance</b>	5 %
<b>Base Load Current At High Overload</b>	211.0 A
<b>Base Load Current At Low Overload</b>	250.0 A
<b>With Safety Function Safely Limited Speed (Sls)</b>	True
<b>With Safety Function Safe Brake Management (Sbc/Sbt)</b>	True
<b>With Safety Function Safe Operating Stop (Sos)</b>	False
<b>With Safety Function Safe Position (Sp)</b>	False

<b>With Safety Function Safe Programmable Logic</b>	False
<b>With Safety Function Safe Speed Monitor (Ssm)</b>	False
<b>With Safety Function Safe Stop 1 (Ss1)</b>	True
<b>With Sft Fct Safe Stop 2 (Ss2)</b>	False
<b>With Safety Function Safe Torque Off (Sto)</b>	True
<b>With Safety Function Safely Limited Position (Slp)</b>	False
<b>With Safety Function Safe Direction (Sdi)</b>	False
<b>Protection Type</b>	<ul style="list-style-type: none"> <li>Thermal protection motor</li> <li>Safe torque off motor</li> <li>Motor phase break motor</li> <li>Thermal protection drive</li> <li>Safe torque off drive</li> <li>Overheating drive</li> <li>Overcurrent between output phases and earth drive</li> <li>Overload of output voltage drive</li> <li>Short-circuit protection drive</li> <li>Motor phase break drive</li> <li>Overvoltages on the DC bus drive</li> <li>Line supply overvoltage drive</li> <li>Line supply undervoltage drive</li> <li>Line supply phase loss drive</li> <li>Overspeed drive</li> <li>Break on the control circuit drive</li> </ul>
<b>Quantity Per Set</b>	1
<b>Width</b>	12.60 in (320 mm)
<b>Height</b>	47.44 in (1205 mm)
<b>Depth</b>	15.47 in (393 mm)
<b>Net Weight</b>	229.28 lb(US) (104 kg)
<b>Electrical Connection</b>	<ul style="list-style-type: none"> <li>Line side screw terminal 2 x 70...3 x 120 mm<sup>2</sup> 2 x AWG 2/0...2 x 300 kcmil</li> <li>DC bus screw terminal 0.5...1.5 mm<sup>2</sup> AWG 20...AWG 16</li> <li>Control screw terminal 0.5...1.5 mm<sup>2</sup> AWG 20...AWG 16</li> </ul>
<b>Transmission Rate</b>	<ul style="list-style-type: none"> <li>10/100 Mbit/s Ethernet IP/Modbus TCP</li> <li>4.8, 9.6, 19.2, 38.4 kbit/s Modbus serial</li> </ul>
<b>Data Format</b>	8 bits, configurable odd, even or no parity Modbus serial
<b>Type Of Polarization</b>	No impedance Modbus serial
<b>Number Of Addresses</b>	1...247 Modbus serial
<b>Local Signalling</b>	<ul style="list-style-type: none"> <li>Local diagnostic 3 LEDs mono/dual colour)</li> <li>5 LEDs dual colour)</li> <li>2 LEDs dual colour)</li> <li>1 LED red)</li> </ul>
<b>Isolation</b>	Between power and control terminals

## Environment

<b>Operating Position</b>	Vertical +/- 10 degree
<b>Product Certifications</b>	<ul style="list-style-type: none"> <li>UL</li> <li>CSA</li> <li>TÜV</li> </ul>
<b>Marking</b>	CE

<b>Standards</b>	UL 508C IEC 61800-3 IEC 61800-5-1 IEC 61000-3-12 IEC 60721-3 IEC 61508 IEC 13849-1
<b>Maximum Thdi</b>	<48 % full load IEC 61000-3-12
<b>Assembly Style</b>	Enclosed
<b>Electromagnetic Compatibility</b>	Electrostatic discharge immunity test level 3 IEC 61000-4-2 Radiated radio-frequency electromagnetic field immunity test level 3 IEC 61000-4-3 Electrical fast transient/burst immunity test level 4 IEC 61000-4-4 1.2/50 $\mu$ s - 8/20 $\mu$ s surge immunity test level 3 IEC 61000-4-5 Conducted radio-frequency immunity test level 3 IEC 61000-4-6
<b>Environmental Class (During Operation)</b>	Class 3C3 according to IEC 60721-3-3 Class 3S3 according to IEC 60721-3-3
<b>Maximum Acceleration Under Shock Impact (During Operation)</b>	150 m/s <sup>2</sup> at 11 ms
<b>Maximum Acceleration Under Vibrational Stress (During Operation)</b>	10 m/s <sup>2</sup> at 13...200 Hz
<b>Maximum Deflection Under Vibratory Load (During Operation)</b>	1.5 mm at 2...13 Hz
<b>Permitted Relative Humidity (During Operation)</b>	Class 3K5 according to EN 60721-3
<b>Overvoltage Category</b>	III
<b>Regulation Loop</b>	Adjustable PID regulator
<b>Insulation Resistance</b>	> 1 MOhm 500 V DC for 1 minute to earth
<b>Noise Level</b>	69.9 dB 86/188/EEC
<b>Vibration Resistance</b>	1.5 mm peak to peak 2...13 Hz)IEC 60068-2-6 1 gn 13...200 Hz)IEC 60068-2-6
<b>Shock Resistance</b>	6 gn 11 ms IEC 60068-2-27
<b>Environmental Characteristic</b>	Chemical pollution resistance class 3C3 IEC 60721-3-3 Dust pollution resistance class 3S3 IEC 60721-3-3
<b>Relative Humidity</b>	5...95 % without condensation IEC 60068-2-3
<b>Ambient Air Temperature For Operation</b>	5...122 °F (-15...50 °C) without derating) 122...140 °F (50...60 °C) with derating factor)
<b>Noise Level</b>	69.9 dB
<b>Pollution Degree</b>	2
<b>Ambient Air Transport Temperature</b>	-13...158 °F (-25...70 °C)
<b>Ambient Air Temperature For Storage</b>	-13...158 °F (-25...70 °C)

## Packing Units

<b>Unit Type Of Package 1</b>	PCE
<b>Number Of Units In Package 1</b>	1
<b>Package 1 Height</b>	27.17 in (69.0 cm)
<b>Package 1 Width</b>	18.90 in (48.0 cm)
<b>Package 1 Length</b>	56.69 in (144.0 cm)
<b>Package 1 Weight</b>	282.19 lb(US) (128.0 kg)

## Sustainability

**Green Premium™ label** is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO<sub>2</sub> products.

**Guide to assessing product sustainability** is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)



Transparency RoHS/REACH

## Resource performance

Upgraded Components Available

## Well-being performance

Mercury Free

Rohs Exemption Information Yes

## Certifications & Standards

Reach Regulation [REACH Declaration](#)

Eu Rohs Directive Pro-active compliance (Product out of EU RoHS legal scope)

China Rohs Regulation [China RoHS declaration](#)

Environmental Disclosure [Product Environmental Profile](#)


Weee The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Circularity Profile [End of Life Information](#)

Dimensions Drawings

Dimensions


Front and Side Views

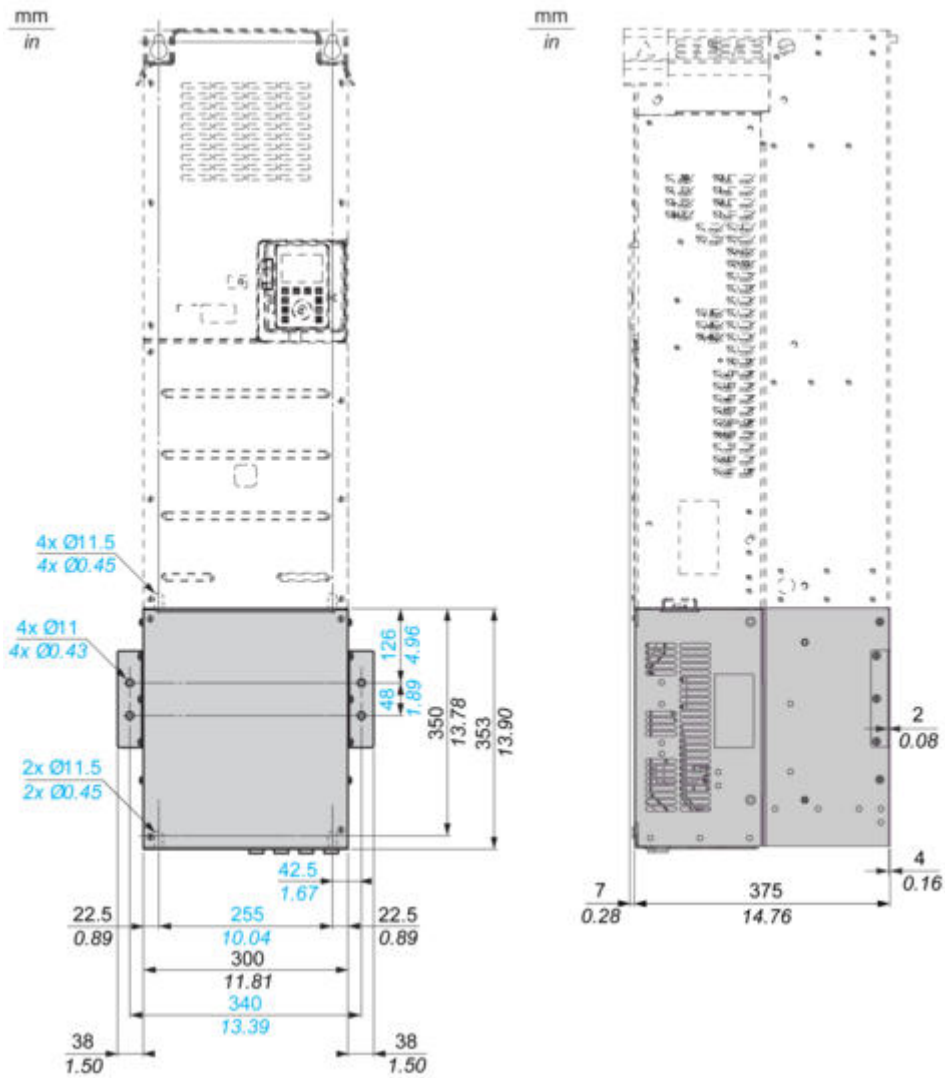

Mounting and Clearance

Dimensions

Front and Side Views

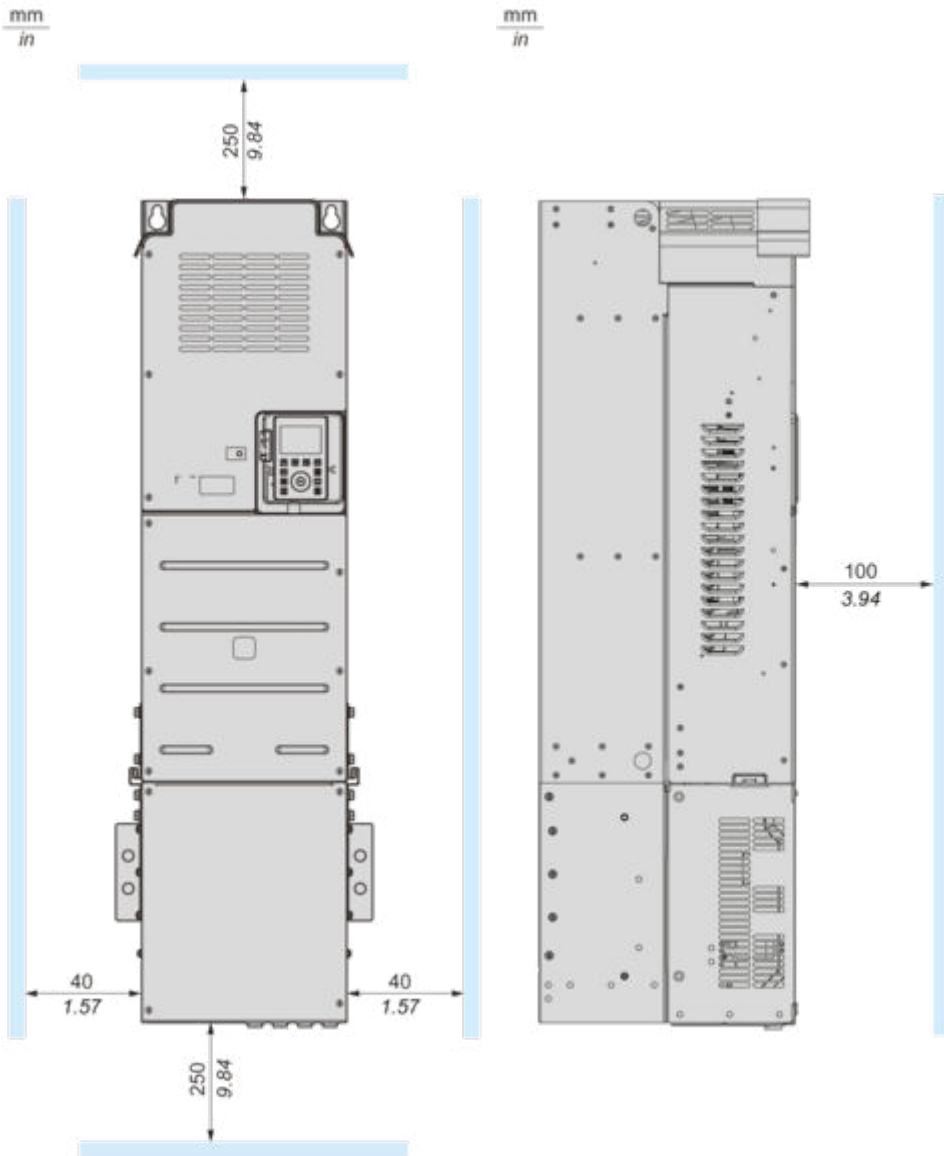

Connections and Schema

Standard Connection Diagram

---

