

Product data sheet

Specifications



counter module, Modicon M340, high speed, 2 channels

BMXEHC0200

Main

Range Of Product	Modicon M340 automation platform
Product Or Component Type	Counter module
Number Of Channels	2
Maximum Counting Frequency	60000 Hz
Number Of Inputs	6
Input Compatibility	19.2...30 V 2-wire/3-wire proximity sensor incremental encoder with push-pull outputs, 10...30 V totem pole
Input Voltage	24 V DC type 3
Number Of Outputs	2
Output Voltage	24 V DC

Complementary

Counter Functions	Loop (modulo) counting Width modulation Down counting Measure time periods Ratio count Count events 32-bit counter counting Frequency meter
Cycle Time	1 ms
Isolation Voltage	1500 V 60 s
Input Type	3 auxiliary input 3 high speed
Input Voltage Limits	30 V
Input Current	2 mA at 11 V
Voltage State 1 Guaranteed	11...30 V
Current State 1 Guaranteed	≥ 6 mA
Voltage State 0 Guaranteed	< 5 V
Current State 0 Guaranteed	≤ 1.5 mA
Discrete Output Logic	Positive or negative configurable
Maximum Output Current	2 A per module 0.5 A per output
Output Voltage Limits	19.2...30 V
Maximum Load Current	1 A per module 0.5 A per output
Maximum Leakage Current	0.1 mA at state 0

Maximum Voltage Drop	<3 V at state 1
Output Overload Protection	Integrated
Output Short-Circuit Protection	1.5 A integrated
Overlap Time	0.2 ms
Electrical Connection	1 connector 10 pins for wiring auxiliary input and sensor power supply 1 connector 16 pins for wiring the sensors of counter 0 1 connector 16 pins for wiring the sensors of counter 1
Current Consumption	200 mA 3.3 V DC bus 40 mA 24 V DC rack 80 mA 24 V DC sensor
Module Format	Standard
Net Weight	0.25 lb(US) (0.112 kg)

Environment

Ambient Air Temperature For Operation	32...140 °F (0...60 °C)
Relative Humidity	10...95 % without condensation
Ip Degree Of Protection	IP20
Directives	2014/35/EU - low voltage directive 2014/30/EU - electromagnetic compatibility
Protective Treatment	TC

Packing Units

Unit Type Of Package 1	PCE
Number Of Units In Package 1	1
Package 1 Height	2.17 in (5.500 cm)
Package 1 Width	4.53 in (11.500 cm)
Package 1 Length	4.65 in (11.800 cm)
Package 1 Weight	4.94 oz (140.000 g)
Unit Type Of Package 2	S02
Number Of Units In Package 2	15
Package 2 Height	5.91 in (15.000 cm)
Package 2 Width	11.81 in (30.000 cm)
Package 2 Length	15.75 in (40.000 cm)
Package 2 Weight	5.34 lb(US) (2.421 kg)

Contractual warranty

Warranty	18 months
-----------------	-----------

Sustainability


Green Premium™ label is Schneider Electric's commitment to delivering products with best-in-class environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.


Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

[Learn more about Green Premium >](#)

[Guide to assess a product's sustainability >](#)

Well-being performance

 Mercury Free

 Rohs Exemption Information [Yes](#)

Reach Regulation [REACH Declaration](#)

Eu Rohs Directive Pro-active compliance (Product out of EU RoHS legal scope)


China Rohs Regulation [China RoHS declaration](#)

Weee The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Dimensions Drawings

Modules Mounted on Racks

Dimensions

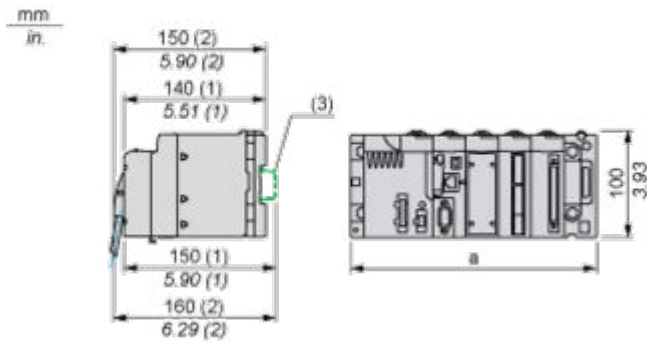

(1) With removable terminal block (cage, screw or spring).

(2) With FCN connector.

(3) On AM1 ED rail: 35 mm wide, 15 mm deep. Only possible with BMXXBP0400/0400H/0600/0600H/0800/0800H rack.

Rack references	a in mm	a in in.
BMXXBP0400 and BMXXBP0400H	242.4	09.54
BMXXBP0600 and BMXXBP0600H	307.6	12.11
BMXXBP0800 and BMXXBP0800H	372.8	14.68
BMXXBP1200 and BMXXBP1200H	503.2	19.81


Connections and Schema

Counting Module Wiring

Note


The two 16-pin connectors and the 10-pin connector are sold separately and are available in the BMXXTSHSC20 connection kit.

Assignment of the 16-Pin Connector

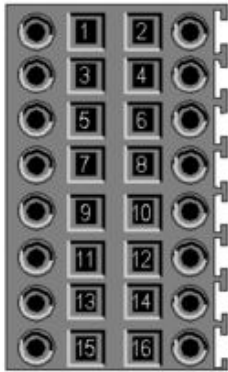


Pin number	Symbol	Description
1, 2, 7, 8	24V_SEN	24 VDC output for sensors supply
5, 6, 13, 14	GND_SEN	24 VDC output for sensors supply
15, 16	FE	Functional earth
3	IN_A	Input A
4	IN_SYNC	Synchronization input
9	IN_B	Input B
10	IN_EN	Enable input selected
11	IN_REF	Homing input
12	IN_CAP	Capture input

Sensors Connection Example

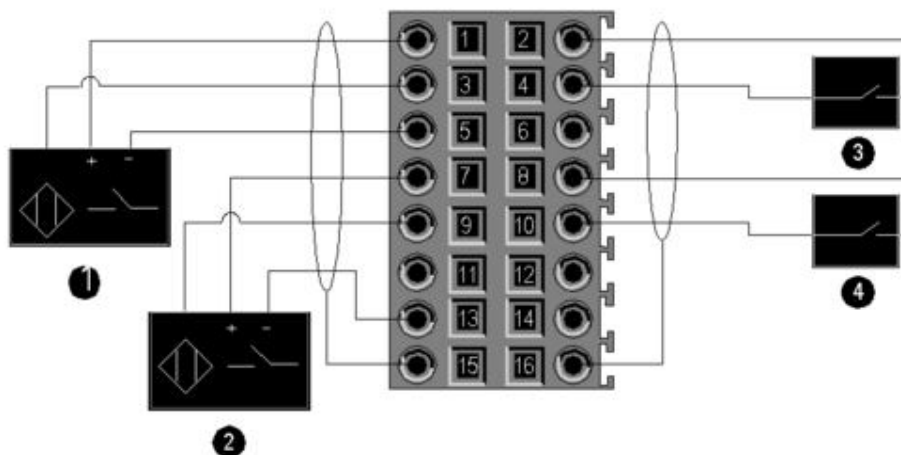


- 1 IN_A input
- 2 IN_B input
- 3 IN_SYNC input (synchronization input)
- 4 IN_EN input (enable input)

Encoder Connection Example for Axis Control

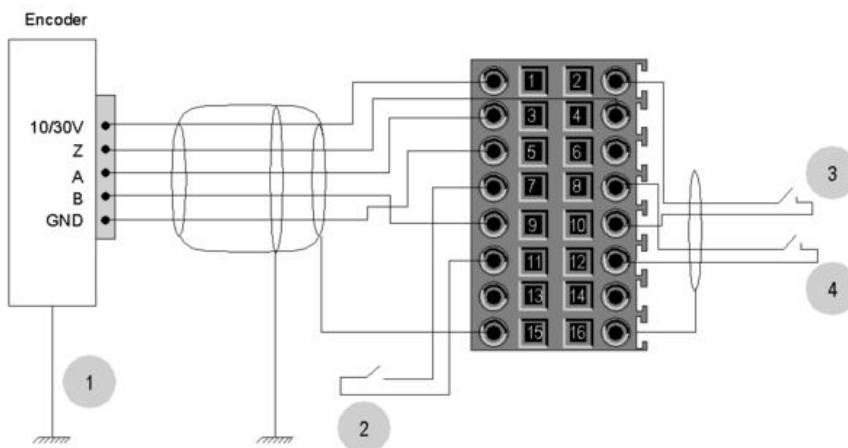


- 1 Encoder (inputs A, B and Z)
- 2 IN_REF input (homing input)
- 3 IN_EN input (enable input)
- 4 IN_CAP input (capture input)

Assignment of the 10-Pin Connector



Pin number	Symbol	Description
1	24V_IN	24 VDC input for sensors supply
2	GND_IN	Return 24 VDC input for sensors supply
5	Q0-1	Q1 output for counting channel 0
6	Q0-0	Q0 output for counting channel 0
7	Q1-1	Q1 output for counting channel 1
8	Q1-0	Q0 output for counting channel 1
9	24V_OUT	24 VDC input for actuators supply
10	GND_OUT	Return 24 VDC input for actuators supply

Connecting Outputs and Supplies

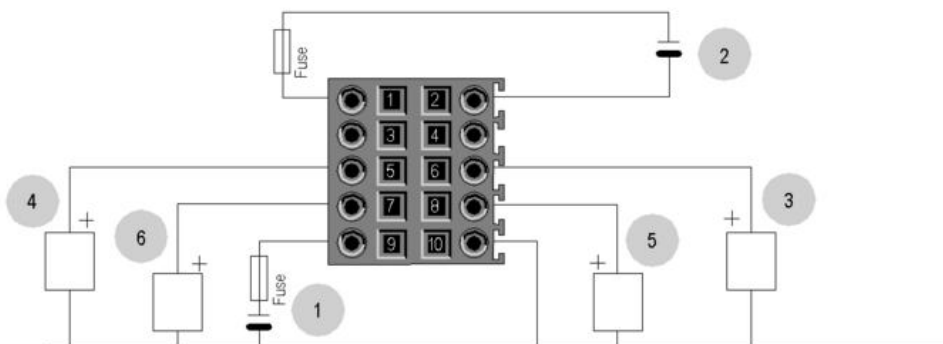

- 1 24 VDC supply for sensors
 - 2 Return 24 VDC supply for sensors
 - 3 Actuator for the Q0 output of counting channel 0
 - 4 Actuator for the Q1 output of counting channel 0
 - 5 Actuator for the Q0 output of counting channel 1
 - 6 Actuator for the Q1 output of counting channel 1
- The Q0 and Q1 outputs are limited by a maximum current of 0.5 A.

Recommended Circuit for high-Noise Environment Using BMXXSP** Electromagnetic Protection Kit**

