

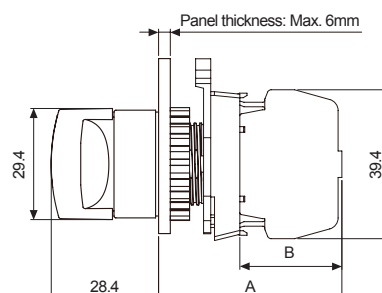



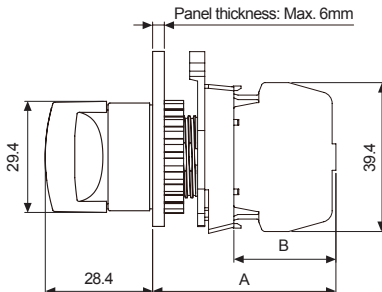



Ø22/25 Round Standard Lever Selector Switches (S2SR Series)

Type	Appearance	Operating position		Model	Contact block		LED block										
					A contact	B contact	AC/DC voltage	AC voltage									
Standard short lever, extended	 S2SR-S1□ 	2-position, spring return		S2SR-S1□A(M)	1	—	—	—									
				S2SR-S1□2A(M)	2	—											
				S2SR-S1□B(M)	—	1											
				S2SR-S1□2B(M)	—	2											
				S2SR-S1□AB(M)	1	1											
		2-position, maintained		S2SR-S3□A(M)	1	—											
				S2SR-S3□2A(M)	2	—											
				S2SR-S3□B(M)	—	1											
				S2SR-S3□2B(M)	—	2											
				S2SR-S3□AB(M)	1	1											
		3-position, spring return two-way		S2SR-S5K□2A(M)	2	—											
				S2SR-S5K□2B(M)	—	2											
				S2SR-S5K□AB(M)	1	1											
		3-position, maintained		S2SR-S7K□2A(M)	2	—											
				S2SR-S7K□2B(M)	—	2											
				S2SR-S7K□AB(M)	1	1											
		3-position, spring return from right		S2SR-SAK□2A(M)	2	—											
				S2SR-SAK□2B(M)	—	2											
				S2SR-SAK□AB(M)	1	1											
		3-position, spring return from left		S2SR-SCK□2A(M)	2	—											
				S2SR-SCK□2B(M)	—	2											
				S2SR-SCK□AB(M)	1	1											
※□ indicates color: W , R																	
※The M in the model name indicates modular type contact block. Models without M are singular contact block.																	
※The control unit, contact blocks, LED blocks are sold separately. (control unit: bold letters, contact block: regular letters)																	
※Connect up to 2 contact blocks. Connect the contact blocks only on the right and left side slots. It will not operate if connected to the center slot.																	
• Dimensions																	
(unit: mm)																	
  <table><tr><td></td><td>A</td><td>B</td></tr><tr><td>Singular type</td><td>48.5</td><td>27.0</td></tr><tr><td>Modular type</td><td>46.5</td><td>25.0</td></tr></table>										A	B	Singular type	48.5	27.0	Modular type	46.5	25.0
	A	B															
Singular type	48.5	27.0															
Modular type	46.5	25.0															
※For panel cut-out dimensions, please refer to page A-82.																	



Type	Appearance	Operating position	Model	Contact block		LED block										
				A contact	B contact	AC/DC voltage	AC voltage									
Standard short lever, extended		3-position, spring return two-way		S2SR-S5 □2A(M)	2	—	—	—								
			S2SR-S5 □2B(M)	—	2											
			S2SR-S5 □AB(M)	1	1											
		3-position, maintained		S2SR-S7 □2A(M)	2	—										
			S2SR-S7 □2B(M)	—	2											
			S2SR-S7 □AB(M)	1	1											
		3-position, spring return from right		S2SR-SA □2A(M)	2	—										
			S2SR-SA □2B(M)	—	2											
			S2SR-SA □AB(M)	1	1											
		3-position, spring return from left		S2SR-SC □2A(M)	2	—										
			S2SR-SC □2B(M)	—	2											
			S2SR-SC □AB(M)	1	1											
※□ indicates color: W, R ※The M in the model name indicates modular type contact block. Models without M are singular contact block. ※The control unit, contact blocks, LED blocks are sold separately. (control unit: bold letters, contact block: regular letters) ※Connect up to 2 contact blocks. Connect the contact blocks only on the right and left side slots. It will not operate if connected to the center slot.																
• Dimensions <table><tr><th></th><th>A</th><th>B</th></tr><tr><td>Singular type</td><td>48.5</td><td>27.0</td></tr><tr><td>Modular type</td><td>46.5</td><td>25.0</td></tr></table> ※For panel cut-out dimensions, please refer to page A-82.									A	B	Singular type	48.5	27.0	Modular type	46.5	25.0
	A	B														
Singular type	48.5	27.0														
Modular type	46.5	25.0														

Control Switches

Ø16

Ø22/25

Ø30

□30

Push Button Switches

Round

Square

Rectangular

Selector Switches

Round

Square

Rectangular

Key Selector Switches

Round

Square

Rectangular

Double Push Button Switches

Mushroom-head Push Button Switches




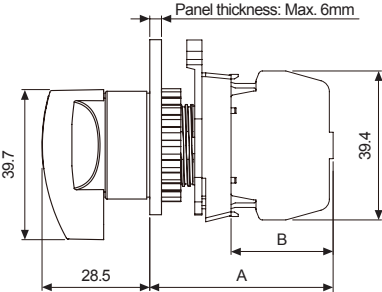
Emergency Switches

Pilot Lights





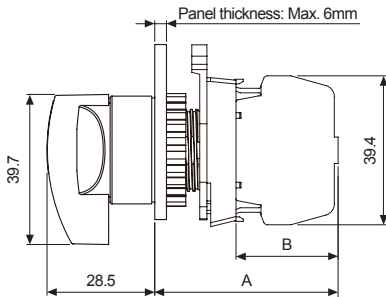

Accessories

Buzzers

Ø22/25 Selector Switches

Type	Appearance	Operating position		Model	Contact block		LED block										
					A contact	B contact	AC/DC voltage	AC voltage									
Standard long lever, extended	 S2SR-S2W□ 	2-position, spring return		S2SR-S2□A(M)	1	—	—	—									
			S2SR-S2□2A(M)	2	—												
			S2SR-S2□B(M)	—	1												
			S2SR-S2□2B(M)	—	2												
			S2SR-S2□AB(M)	1	1												
		2-position, maintained		S2SR-S4□A(M)	1	—											
				S2SR-S4□2A(M)	2	—											
				S2SR-S4□B(M)	—	1											
				S2SR-S4□2B(M)	—	2											
				S2SR-S4□AB(M)	1	1											
		3-position, spring return two-way		S2SR-S6K□2A(M)	2	—											
				S2SR-S6K□2B(M)	—	2											
				S2SR-S6K□AB(M)	1	1											
		3-position, maintained		S2SR-S8K□2A(M)	2	—											
				S2SR-S8K□2B(M)	—	2											
				S2SR-S8K□AB(M)	1	1											
		3-position, spring return from right		S2SR-SBK□2A(M)	2	—											
				S2SR-SBK□2B(M)	—	2											
				S2SR-SBK□AB(M)	1	1											
		3-position, spring return from left		S2SR-SDK□2A(M)	2	—											
				S2SR-SDK□2B(M)	—	2											
				S2SR-SDK□AB(M)	1	1											
※□ indicates color: W , R																	
※The M in the model name indicates modular type contact block. Models without M are singular contact block.																	
※The control unit, contact blocks, LED blocks are sold separately. (control unit: bold letters, contact block: regular letters)																	
※Connect up to 2 contact blocks. Connect the contact blocks only on the right and left side slots. It will not operate if connected to the center slot.																	
• Dimensions (unit: mm)   <table><tr><th></th><th>A</th><th>B</th></tr><tr><td>Singular type</td><td>48.5</td><td>27.0</td></tr><tr><td>Modular type</td><td>46.5</td><td>25.0</td></tr></table>										A	B	Singular type	48.5	27.0	Modular type	46.5	25.0
	A	B															
Singular type	48.5	27.0															
Modular type	46.5	25.0															
※For panel cut-out dimensions, please refer to page A-82																	



Type	Appearance	Operating position	Model	Contact block		LED block									
				A contact	B contact	AC/DC voltage	AC voltage								
Standard long lever, extended	 S2SR-S2W□ 	3-position, spring return two-way		S2SR-S6□2A(M)	2	—	—	—							
				S2SR-S6□2B(M)	—	2									
				S2SR-S6□AB(M)	1	1									
		3-position, maintained		S2SR-S8□2A(M)	2	—									
				S2SR-S8□2B(M)	—	2									
				S2SR-S8□AB(M)	1	1									
		3-position, spring return from right		S2SR-SB□2A(M)	2	—									
				S2SR-SB□2B(M)	—	2									
				S2SR-SB□AB(M)	1	1									
		3-position, spring return from left		S2SR-SD□2A(M)	2	—									
				S2SR-SD□2B(M)	—	2									
				S2SR-SD□AB(M)	1	1									
		※□ indicates color: W , R ※The M in the model name indicates modular type contact block. Models without M are singular contact block. ※The control unit, contact blocks, LED blocks are sold separately. (control unit: bold letters, contact block: regular letters) ※Connect up to 2 contact blocks. Connect the contact blocks only on the right and left side slots. It will not operate if connected to the center slot.													
		• Dimensions (unit: mm) <table><tr><td></td><td>A</td><td>B</td></tr><tr><td>Singular type</td><td>48.5</td><td>27.0</td></tr><tr><td>Modular type</td><td>46.5</td><td>25.0</td></tr></table>								A	B	Singular type	48.5	27.0	Modular type
	A	B													
Singular type	48.5	27.0													
Modular type	46.5	25.0													
※For panel cut-out dimensions, please refer to page A-82.															

Control Switches

Ø16

Ø22/25

Ø30

□30

Push Button Switches

Round

Square

Rectangular

Selector Switches

Round

Square

Rectangular

Key Selector Switches

Round

Square

Rectangular

Double Push Button Switches

Mushroom-head Push Button Switches




Emergency Switches

Pilot Lights

Accessories

Buzzers

Ø22/25 Round Shark Lever Selector Switches (S2SRN Series)

Type	Appearance	Operating position		Model	Contact block		LED block										
					A contact	B contact	AC/DC voltage	AC voltage									
Short shark-head lever, extended	 S2SRN-S1AW□ 	2-position, spring return		S2SRN-S1A□A(M)	1	—	—	—									
				S2SRN-S1A□2A(M)	2	—											
				S2SRN-S1A□B(M)	—	1											
				S2SRN-S1A□2B(M)	—	2											
				S2SRN-S1A□AB(M)	1	1											
		2-position, maintained		S2SRN-S3A□A(M)	1	—											
				S2SRN-S3A□2A(M)	2	—											
				S2SRN-S3A□B(M)	—	1											
				S2SRN-S3A□2B(M)	—	2											
				S2SRN-S3A□AB(M)	1	1											
		2-position, spring return		S2SRN-S1B□A(M)	1	—											
				S2SRN-S1B□2A(M)	2	—											
				S2SRN-S1B□B(M)	—	1											
				S2SRN-S1B□2B(M)	—	2											
				S2SRN-S1B□AB(M)	1	1											
		2-position, maintained		S2SRN-S3B□A(M)	1	—											
				S2SRN-S3B□2A(M)	2	—											
				S2SRN-S3B□B(M)	—	1											
				S2SRN-S3B□2B(M)	—	2											
				S2SRN-S3B□AB(M)	1	1											
		2-position, spring return		S2SRN-S1□A(M)	1	—											
				S2SRN-S1□2A(M)	2	—											
				S2SRN-S1□B(M)	—	1											
				S2SRN-S1□2B(M)	—	2											
				S2SRN-S1□AB(M)	1	1											
※□ indicates color: W , R																	
※The M in the model name indicates modular type contact block. Models without M are singular contact block.																	
※The control unit and contact blocks are sold separately. (control unit: bold letters, contact block: regular letters)																	
※Connect up to 2 contact blocks. Connect the contact blocks only on the right and left side slots. It will not operate if connected to the center slot.																	
• Dimensions																	
 48.1 30.4  Panel thickness: Max. 6mm 25.3 39.4 A B <table><tr><td></td><td>A</td><td>B</td></tr><tr><td>Singular type</td><td>48.5</td><td>27.0</td></tr><tr><td>Modular type</td><td>46.5</td><td>25.0</td></tr></table> (unit: mm)										A	B	Singular type	48.5	27.0	Modular type	46.5	25.0
	A	B															
Singular type	48.5	27.0															
Modular type	46.5	25.0															
※For panel cut-out dimensions, please refer to page A-82.																	



Type	Appearance	Operating position	Model	Contact block		LED block	
				A contact	B contact	AC/DC voltage	AC voltage
Short shark-head lever, extended		3-position, spring return two-way	S2SRN-S5K□ 2A(M)	2	—	—	—
			S2SRN-S5K□ 2B(M)	—	2		
			S2SRN-S5K□ AB(M)	1	1		
		3-position, maintained	S2SRN-S7K□ 2A(M)	2	—		
			S2SRN-S7K□ 2B(M)	—	2		
			S2SRN-S7K□ AB(M)	1	1		
		3-position, spring return from right	S2SRN-SAK□ 2A(M)	2	—		
			S2SRN-SAK□ 2B(M)	—	2		
			S2SRN-SAK□ AB(M)	1	1		
		3-position, spring return from left	S2SRN-SCK□ 2A(M)	2	—		
			S2SRN-SCK□ 2B(M)	—	2		
			S2SRN-SCK□ AB(M)	1	1		
		3-position, spring return two-way	S2SRN-S5□2A(M)	2	—		
			S2SRN-S5□2B(M)	—	2		
			S2SRN-S5□AB(M)	1	1		
		3-position, maintained	S2SRN-S7□2A(M)	2	—		
			S2SRN-S7□2B(M)	—	2		
			S2SRN-S7□AB(M)	1	1		
		3-position, spring return from right	S2SRN-SA□2A(M)	2	—		
			S2SRN-SA□2B(M)	—	2		
			S2SRN-SA□AB(M)	1	1		
		3-position, spring return from left	S2SRN-SC□2A(M)	2	—		
			S2SRN-SC□2B(M)	—	2		
			S2SRN-SC□AB(M)	1	1		

※□ indicates color: **W**, **R**

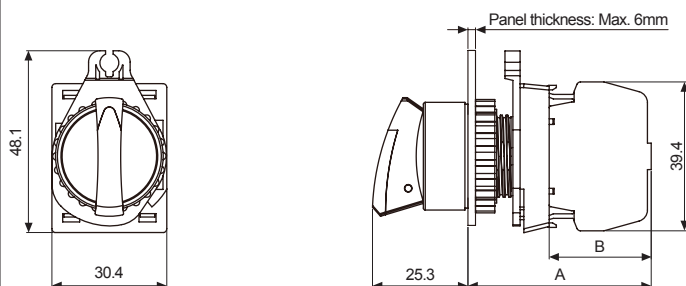
※The M in the model name indicates modular type contact block. Models without M are singular contact block.

※The control unit and contact blocks are sold separately.

(control unit: bold letters, contact block: regular letters)

※Connect up to 2 contact blocks. Connect the contact blocks only on the right and left side slots.
It will not operate if connected to the center slot.

• Dimensions



(unit: mm)

	A	B
Singular type	48.5	27.0
Modular type	46.5	25.0

※For panel cut-out dimensions, please refer to page A-82.

Control Switches

Ø16

Ø22/25

Ø30

□30

Push Button Switches

Round

Square

Rectangular

Selector Switches

Round

Square

Rectangular

Key Selector Switches

Round

Square

Rectangular

Double Push Button Switches

Mushroom-head Push Button Switches

Emergency Switches






Pilot Lights

Accessories


Buzzers



Ø22/25 Selector Switches

Type	Appearance	Operating position		Model	Contact block		LED block										
					A contact	B contact	AC/DC voltage	AC voltage									
Long shark-head lever, extended	 S2SRN-S2AR□ 	2-position, spring return		S2SRN-S2A□A(M)	1	—	—	—									
				S2SRN-S2A□2A(M)	2	—											
				S2SRN-S2A□B(M)	—	1											
				S2SRN-S2A□2B(M)	—	2											
				S2SRN-S2A□AB(M)	1	1											
		2-position, maintained		S2SRN-S4A□A(M)	1	—											
				S2SRN-S4A□2A(M)	2	—											
				S2SRN-S4A□B(M)	—	1											
				S2SRN-S4A□2B(M)	—	2											
				S2SRN-S4A□AB(M)	1	1											
		2-position, spring return		S2SRN-S2B□A(M)	1	—											
				S2SRN-S2B□2A(M)	2	—											
				S2SRN-S2B□B(M)	—	1											
				S2SRN-S2B□2B(M)	—	2											
				S2SRN-S2B□AB(M)	1	1											
		2-position, maintained		S2SRN-S4B□A(M)	1	—											
				S2SRN-S4B□2A(M)	2	—											
				S2SRN-S4B□B(M)	—	1											
				S2SRN-S4B□2B(M)	—	2											
				S2SRN-S4B□AB(M)	1	1											
		2-position, spring return		S2SRN-S2□A(M)	1	—											
				S2SRN-S2□2A(M)	2	—											
				S2SRN-S2□B(M)	—	1											
				S2SRN-S2□2B(M)	—	2											
				S2SRN-S2□AB(M)	1	1											
※□ indicates color: W , R																	
※The M in the model name indicates modular type contact block. Models without M are singular contact block.																	
※The control unit and contact blocks are sold separately. (control unit: bold letters, contact block: regular letters)																	
※Connect up to 2 contact blocks. Connect the contact blocks only on the right and left side slots. It will not operate if connected to the center slot.																	
• Dimensions (unit: mm) <table><tr><td></td><td>A</td><td>B</td></tr><tr><td>Singular type</td><td>48.5</td><td>27.0</td></tr><tr><td>Modular type</td><td>46.5</td><td>25.0</td></tr></table>										A	B	Singular type	48.5	27.0	Modular type	46.5	25.0
	A	B															
Singular type	48.5	27.0															
Modular type	46.5	25.0															
※For panel cut-out dimensions, please refer to page A-82.																	



Type	Appearance	Operating position		Model	Contact block		LED block	
					A contact	B contact	AC/DC voltage	AC voltage
Long shark-head lever, extended	 	3-position, spring return two-way		S2SRN-S6K□2A(M)	2	—	—	—
			S2SRN-S6K□2B(M)	—	2			
			S2SRN-S6K□AB(M)	1	1			
		3-position, maintained		S2SRN-S8K□2A(M)	2	—		
				S2SRN-S8K□2B(M)	—	2		
				S2SRN-S8K□AB(M)	1	1		
		3-position, spring return from right		S2SRN-SBK□2A(M)	2	—		
				S2SRN-SBK□2B(M)	—	2		
				S2SRN-SBK□AB(M)	1	1		
		3-position, spring return from left		S2SRN-SDK□2A(M)	2	—		
				S2SRN-SDK□2B(M)	—	2		
				S2SRN-SDK□AB(M)	1	1		
		3-position, spring return two-way		S2SRN-S6□2A(M)	2	—		
				S2SRN-S6□2B(M)	—	2		
				S2SRN-S6□AB(M)	1	1		
		3-position, maintained		S2SRN-S8□2A(M)	2	—		
				S2SRN-S8□2B(M)	—	2		
				S2SRN-S8□AB(M)	1	1		
		3-position, spring return from right		S2SRN-SB□2A(M)	2	—		
				S2SRN-SB□2B(M)	—	2		
				S2SRN-SB□AB(M)	1	1		
		3-position, spring return from left		S2SRN-SD□2A(M)	2	—		
				S2SRN-SD□2B(M)	—	2		
				S2SRN-SD□AB(M)	1	1		

※□ indicates color: **W**, **R**

※The M in the model name indicates modular type contact block. Models without M are singular contact block.

※The control unit and contact blocks are sold separately.

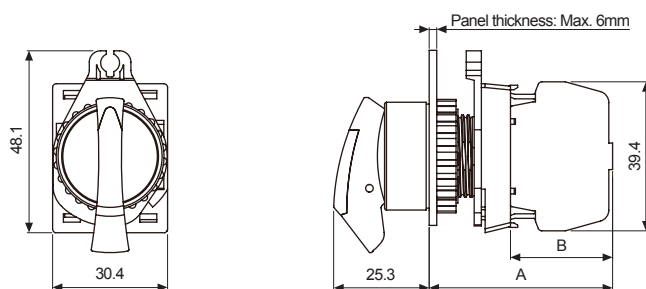
(control unit: bold letters, contact block: regular letters)

※Connect up to 2 contact blocks. Connect the contact blocks only on the right and left side slots.

It will not operate if connected to the center slot.

• Dimensions

(unit: mm)



	A	B
Singular type	48.5	27.0
Modular type	46.5	25.0

※For panel cut-out dimensions, please refer to page A-82.

Control Switches

Ø16

Ø22/25

Ø30

□30

Push Button Switches

Round

Square

Rectangular

Selector Switches

Round

Square

Rectangular

Key Selector Switches

Round

Square

Rectangular

Double Push Button Switches

Mushroom-head Push Button Switches

Emergency Switches





Pilot Lights

Accessories




Buzzers



Ø22/25 Selector Switches

Type	Appearance	Operating position		Model	Contact block		LED block										
					A contact	B contact	AC/DC voltage	AC voltage									
Short shark-head lever, extended (illuminated)	 S2SRN-L1AR□	2-position, spring return		S2SRN-L1A□AL(M)	1	—	—	1									
				S2SRN-L1A□2AL(M)	2	—											
				S2SRN-L1A□BL(M)	—	1											
				S2SRN-L1A□2BL(M)	—	2											
				S2SRN-L1A□ABL(M)	1	1											
		2-position, maintained		S2SRN-L3A□AL(M)	1	—											
				S2SRN-L3A□2AL(M)	2	—											
				S2SRN-L3A□BL(M)	—	1											
				S2SRN-L3A□2BL(M)	—	2											
				S2SRN-L3A□ABL(M)	1	1											
		2-position, spring return		S2SRN-L1B□AL(M)	1	—											
				S2SRN-L1B□2AL(M)	2	—											
				S2SRN-L1B□BL(M)	—	1											
				S2SRN-L1B□2BL(M)	—	2											
				S2SRN-L1B□ABL(M)	1	1											
		2-position, maintained		S2SRN-L3B□AL(M)	1	—											
				S2SRN-L3B□2AL(M)	2	—											
				S2SRN-L3B□BL(M)	—	1											
				S2SRN-L3B□2BL(M)	—	2											
				S2SRN-L3B□ABL(M)	1	1											
		2-position, spring return		S2SRN-L1□AL(M)	1	—											
				S2SRN-L1□2AL(M)	2	—											
				S2SRN-L1□BL(M)	—	1											
				S2SRN-L1□2BL(M)	—	2											
				S2SRN-L1□ABL(M)	1	1											
※□ indicates color: R , B , G , Y																	
※The M in the model name indicates modular type contact block. Models without M are singular contact block.																	
※The control unit, contact blocks, LED blocks are sold separately. (control unit: bold letters, contact and LED block: regular letters)																	
※The LED color is the same as the control unit.																	
※Connect up to 2 contact blocks. Connect the contact blocks only on the right and left side slots. It will not operate if connected to the center slot.																	
• Dimensions																	
  <table><tr><td></td><td>A</td><td>B</td></tr><tr><td>Singular type</td><td>48.5</td><td>27.0</td></tr><tr><td>Modular type</td><td>46.5</td><td>25.0</td></tr></table> Panel thickness: Max. 6mm (unit: mm)										A	B	Singular type	48.5	27.0	Modular type	46.5	25.0
	A	B															
Singular type	48.5	27.0															
Modular type	46.5	25.0															
※For panel cut-out dimensions, please refer to page A-82.																	





Type	Appearance	Operating position	Model	Contact block		LED block	
				A contact	B contact	AC/DC voltage	AC voltage
Short shark-head lever, extended (illuminated)	 S2SRN-L1AR□	3-position, spring return two-way	 S2SRN-L5K□2AL(M)	2	—	—	1
			S2SRN-L5K□2BL(M)	—	2		
			S2SRN-L5K□ABL(M)	1	1		
		3-position, maintained	 S2SRN-L7K□2AL(M)	2	—		
			S2SRN-L7K□2BL(M)	—	2		
			S2SRN-L7K□ABL(M)	1	1		
		3-position, spring return from right	 S2SRN-LAK□2AL(M)	2	—		
			S2SRN-LAK□2BL(M)	—	2		
			S2SRN-LAK□ABL(M)	1	1		
		3-position, spring return from left	 S2SRN-LCK□2AL(M)	2	—		
			S2SRN-LCK□2BL(M)	—	2		
			S2SRN-LCK□ABL(M)	1	1		
		3-position, spring return two-way	 S2SRN-L5□2AL(M)	2	—		
			S2SRN-L5□2BL(M)	—	2		
			S2SRN-L5□ABL(M)	1	1		
		3-position, maintained	 S2SRN-L7□2AL(M)	2	—		
			S2SRN-L7□2BL(M)	—	2		
			S2SRN-L7□ABL(M)	1	1		
		3-position, spring return from right	 S2SRN-LA□2AL(M)	2	—		
			S2SRN-LA□2BL(M)	—	2		
			S2SRN-LA□ABL(M)	1	1		
		3-position, spring return from left	 S2SRN-LC□2AL(M)	2	—		
			S2SRN-LC□2BL(M)	—	2		
			S2SRN-LC□ABL(M)	1	1		

※□ indicates color: R, B, G, Y
 ※The M in the model name indicates modular type contact block. Models without M are singular contact block.
 ※The control unit, contact blocks, LED blocks are sold separately.
 (control unit: bold letters, contact and LED block: regular letters)
 ※The LED color is the same as the control unit.
 ※Connect up to 2 contact blocks. Connect the contact blocks only on the right and left side slots.
 It will not operate if connected to the center slot.

• Dimensions

(unit: mm)

	A	B
Singular type	48.5	27.0
Modular type	46.5	25.0

※For panel cut-out dimensions, please refer to page A-82.

Control Switches

Ø16

Ø22/25

Ø30

□30

Push Button Switches

Round

Square

Rectangular

Selector Switches

Round

Square

Rectangular

Key Selector Switches

Round

Square

Rectangular

Double Push Button Switches

Mushroom-head Push Button Switches

Emergency Switches




Pilot Lights

Accessories

Buzzers





Ø22/25 Selector Switches

Type	Appearance	Operating position		Model	Contact block		LED block										
					A contact	B contact	AC/DC voltage	AC voltage									
Short shark-head lever, extended (illuminated)	 S2SRN-L1AR□	2-position, spring return		S2SRN-L1A□AD(M)	1	—	1	—									
				S2SRN-L1A□2AD(M)	2	—											
				S2SRN-L1A□BD(M)	—	1											
				S2SRN-L1A□2BD(M)	—	2											
				S2SRN-L1A□ABD(M)	1	1											
		2-position, maintained		S2SRN-L3A□AD(M)	1	—											
				S2SRN-L3A□2AD(M)	2	—											
				S2SRN-L3A□BD(M)	—	1											
				S2SRN-L3A□2BD(M)	—	2											
				S2SRN-L3A□ABD(M)	1	1											
		2-position, spring return		S2SRN-L1B□AD(M)	1	—											
				S2SRN-L1B□2AD(M)	2	—											
				S2SRN-L1B□BD(M)	—	1											
				S2SRN-L1B□2BD(M)	—	2											
				S2SRN-L1B□ABD(M)	1	1											
		2-position, maintained		S2SRN-L3B□AD(M)	1	—											
				S2SRN-L3B□2AD(M)	2	—											
				S2SRN-L3B□BD(M)	—	1											
				S2SRN-L3B□2BD(M)	—	2											
				S2SRN-L3B□ABD(M)	1	1											
		2-position, spring return		S2SRN-L1□AD(M)	1	—											
				S2SRN-L1□2AD(M)	2	—											
				S2SRN-L1□BD(M)	—	1											
				S2SRN-L1□2BD(M)	—	2											
				S2SRN-L1□ABD(M)	1	1											
※□ indicates color: R , B , G , Y																	
※The M in the model name indicates modular type contact block. Models without M are singular contact block.																	
※The control unit, contact blocks, LED blocks are sold separately. (control unit: bold letters, contact and LED block: regular letters)																	
※The LED color is the same as the control unit.																	
※Connect up to 2 contact blocks. Connect the contact blocks only on the right and left side slots. It will not operate if connected to the center slot.																	
• Dimensions (unit: mm)																	
<table><tr><th></th><th>A</th><th>B</th></tr><tr><td>Singular type</td><td>48.5</td><td>27.0</td></tr><tr><td>Modular type</td><td>46.5</td><td>25.0</td></tr></table>										A	B	Singular type	48.5	27.0	Modular type	46.5	25.0
	A	B															
Singular type	48.5	27.0															
Modular type	46.5	25.0															
※For panel cut-out dimensions, please refer to page A-82.																	



Ø22/25 Selector Switches

Type	Appearance	Operating position	Model	Contact block		LED block	
				A contact	B contact	AC/DC voltage	AC voltage
Short shark-head lever, extended (illuminated)	 S2SRN-L1AR□	3-position, spring return two-way	 S2SRN-L5K□2AD(M)	2	—	1	—
			S2SRN-L5K□2BD(M)	—	2		
			S2SRN-L5K□ABD(M)	1	1		
		3-position, maintained	 S2SRN-L7K□2AD(M)	2	—		
			S2SRN-L7K□2BD(M)	—	2		
			S2SRN-L7K□ABD(M)	1	1		
		3-position, spring return from right	 S2SRN-LAK□2AD(M)	2	—		
			S2SRN-LAK□2BD(M)	—	2		
			S2SRN-LAK□ABD(M)	1	1		
		3-position, spring return from left	 S2SRN-LCK□2AD(M)	2	—		
			S2SRN-LCK□2BD(M)	—	2		
			S2SRN-LCK□ABD(M)	1	1		
		3-position, spring return two-way	 S2SRN-L5□2AD(M)	2	—		
			S2SRN-L5□2BD(M)	—	2		
			S2SRN-L5□ABD(M)	1	1		
		3-position, maintained	 S2SRN-L7□2AD(M)	2	—		
			S2SRN-L7□2BD(M)	—	2		
			S2SRN-L7□ABD(M)	1	1		
		3-position, spring return from right	 S2SRN-LA□2AD(M)	2	—		
			S2SRN-LA□2BD(M)	—	2		
			S2SRN-LA□ABD(M)	1	1		
		3-position, spring return from left	 S2SRN-LC□2AD(M)	2	—		
			S2SRN-LC□2BD(M)	—	2		
			S2SRN-LC□ABD(M)	1	1		

※□ indicates color: R, B, G, Y

※The M in the model name indicates modular type contact block. Models without M are singular contact block.

※The control unit, contact blocks, LED blocks are sold separately.

(control unit: bold letters, contact and LED block: regular letters)

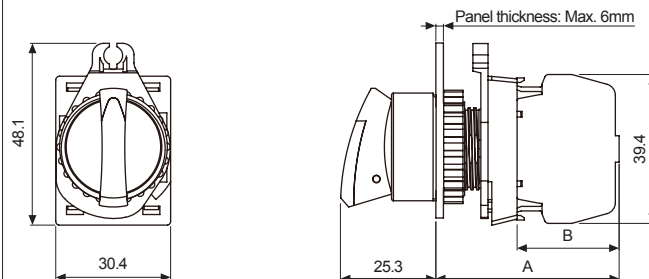
※The LED color is the same as the control unit.

※Connect up to 2 contact blocks. Connect the contact blocks only on the right and left side slots.

It will not operate if connected to the center slot.

• Dimensions

(unit: mm)



	A	B
Singular type	48.5	27.0
Modular type	46.5	25.0

※For panel cut-out dimensions, please refer to page A-82.

Control Switches

Ø16

Ø22/25

Ø30

□30

Push Button Switches

Round

Square

Rectangular

Selector Switches

Round

Square

Rectangular

Key Selector Switches

Round

Square

Rectangular

Double Push Button Switches

Mushroom-head Push Button Switches

Emergency Switches



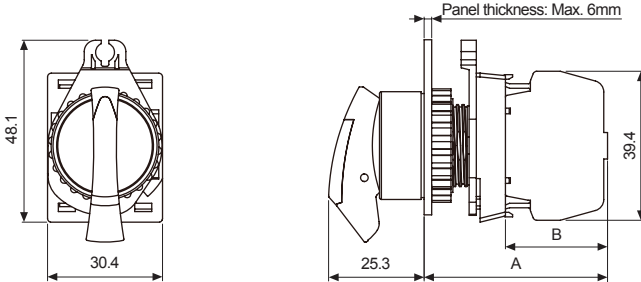
Pilot Lights

Accessories

Buzzers







Ø22/25 Selector Switches

Type	Appearance	Operating position		Model	Contact block		LED block										
					A contact	B contact	AC/DC voltage	AC voltage									
Long shark-head lever, extended (illuminated)	 S2SRN-L2AR□ 	2-position, spring return		S2SRN-L2A□AL(M)	1	—	—	1									
				S2SRN-L2A□2AL(M)	2	—											
				S2SRN-L2A□BL(M)	—	1											
				S2SRN-L2A□2BL(M)	—	2											
				S2SRN-L2A□ABL(M)	1	1											
		2-position, maintained		S2SRN-L4A□AL(M)	1	—											
				S2SRN-L4A□2AL(M)	2	—											
				S2SRN-L4A□BL(M)	—	1											
				S2SRN-L4A□2BL(M)	—	2											
				S2SRN-L4A□ABL(M)	1	1											
		2-position, spring return		S2SRN-L2B□AL(M)	1	—											
				S2SRN-L2B□2AL(M)	2	—											
				S2SRN-L2B□BL(M)	—	1											
				S2SRN-L2B□2BL(M)	—	2											
				S2SRN-L2B□ABL(M)	1	1											
		2-position, maintained		S2SRN-L4B□AL(M)	1	—											
				S2SRN-L4B□2AL(M)	2	—											
				S2SRN-L4B□BL(M)	—	1											
				S2SRN-L4B□2BL(M)	—	2											
				S2SRN-L4B□ABL(M)	1	1											
		2-position, spring return		S2SRN-L2□AL(M)	1	—											
				S2SRN-L2□2AL(M)	2	—											
				S2SRN-L2□BL(M)	—	1											
				S2SRN-L2□2BL(M)	—	2											
				S2SRN-L2□ABL(M)	1	1											
※□ indicates color: R , B , G , Y																	
※The M in the model name indicates modular type contact block. Models without M are singular contact block.																	
※The control unit, contact blocks, LED blocks are sold separately. (control unit: bold letters, contact and LED block: regular letters)																	
※The LED color is the same as the control unit.																	
※Connect up to 2 contact blocks. Connect the contact blocks only on the right and left side slots. It will not operate if connected to the center slot.																	
• Dimensions																	
(unit: mm)																	
																	
<table><tr><td></td><td>A</td><td>B</td></tr><tr><td>Singular type</td><td>48.5</td><td>27.0</td></tr><tr><td>Modular type</td><td>46.5</td><td>25.0</td></tr></table>										A	B	Singular type	48.5	27.0	Modular type	46.5	25.0
	A	B															
Singular type	48.5	27.0															
Modular type	46.5	25.0															
※For panel cut-out dimensions, please refer to page A-82.																	



Ø22/25 Selector Switches

Type	Appearance	Operating position		Model	Contact block		LED block	
					A contact	B contact	AC/DC voltage	AC voltage
Long shark-head lever, extended (illuminated)		3-position, spring return two-way		S2SRN-L6K□2AL(M)	2	—	—	1
			S2SRN-L6K□2BL(M)	—	2			
			S2SRN-L6K□ABL(M)	1	1			
		3-position, maintained		S2SRN-L8K□2AL(M)	2	—		
			S2SRN-L8K□2BL(M)	—	2			
			S2SRN-L8K□ABL(M)	1	1			
		3-position, spring return from right		S2SRN-LBK□2AL(M)	2	—		
			S2SRN-LBK□2BL(M)	—	2			
			S2SRN-LBK□ABL(M)	1	1			
		3-position, spring return from left		S2SRN-LDK□2AL(M)	2	—		
			S2SRN-LDK□2BL(M)	—	2			
			S2SRN-LDK□ABL(M)	1	1			
		3-position, spring return two-way		S2SRN-L6□2AL(M)	2	—		
			S2SRN-L6□2BL(M)	—	2			
			S2SRN-L6□ABL(M)	1	1			
		3-position, maintained		S2SRN-L8□2AL(M)	2	—		
			S2SRN-L8□2BL(M)	—	2			
			S2SRN-L8□ABL(M)	1	1			
		3-position, spring return from right		S2SRN-LB□2AL(M)	2	—		
			S2SRN-LB□2BL(M)	—	2			
			S2SRN-LB□ABL(M)	1	1			
		3-position, spring return from left		S2SRN-LD□2AL(M)	2	—		
			S2SRN-LD□2BL(M)	—	2			
			S2SRN-LD□ABL(M)	1	1			

※□ indicates color: R, B, G, Y

※The M in the model name indicates modular type contact block. Models without M are singular contact block.

※The control unit, contact blocks, LED blocks are sold separately.

(control unit: bold letters, contact and LED block: regular letters)

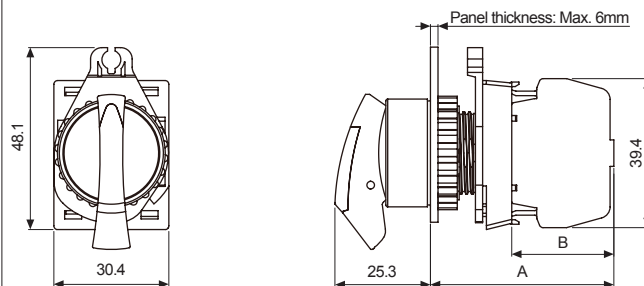
※The LED color is the same as the control unit.

※Connect up to 2 contact blocks. Connect the contact blocks only on the right and left side slots.

It will not operate if connected to the center slot.

• Dimensions

(unit: mm)



	A	B
Singular type	48.5	27.0
Modular type	46.5	25.0

※For panel cut-out dimensions, please refer to page A-82.

Control Switches

Ø16

Ø22/25

Ø30

□30

Push Button Switches

Round

Square

Rectangular

Selector Switches

Round

Square

Rectangular

Key Selector Switches

Round

Square

Rectangular

Double Push Button Switches

Mushroom-head Push Button Switches

Emergency Switches



Pilot Lights

Accessories

Buzzers





Ø22/25 Selector Switches

Type	Appearance	Operating position		Model	Contact block		LED block	
					A contact	B contact	AC/DC voltage	AC voltage
Long shark-head lever, extended (illuminated)	 S2SRN-L2AR□	2-position, spring return		S2SRN-L2A□AD(M)	1	—	1	—
				S2SRN-L2A□2AD(M)	2	—		
				S2SRN-L2A□BD(M)	—	1		
				S2SRN-L2A□2BD(M)	—	2		
				S2SRN-L2A□ABD(M)	1	1		
		2-position, maintained		S2SRN-L4A□AD(M)	1	—		
				S2SRN-L4A□2AD(M)	2	—		
				S2SRN-L4A□BD(M)	—	1		
				S2SRN-L4A□2BD(M)	—	2		
				S2SRN-L4A□ABD(M)	1	1		
		2-position, spring return		S2SRN-L2B□AD(M)	1	—		
				S2SRN-L2B□2AD(M)	2	—		
				S2SRN-L2B□BD(M)	—	1		
				S2SRN-L2B□2BD(M)	—	2		
				S2SRN-L2B□ABD(M)	1	1		
		2-position, maintained		S2SRN-L4B□AD(M)	1	—		
				S2SRN-L4B□2AD(M)	2	—		
				S2SRN-L4B□BD(M)	—	1		
				S2SRN-L4B□2BD(M)	—	2		
				S2SRN-L4B□ABD(M)	1	1		
		2-position, spring return		S2SRN-L2□AD(M)	1	—		
				S2SRN-L2□2AD(M)	2	—		
				S2SRN-L2□BD(M)	—	1		
				S2SRN-L2□2BD(M)	—	2		
				S2SRN-L2□ABD(M)	1	1		

※□ indicates color: R, B, G, Y
 ※The M in the model name indicates modular type contact block. Models without M are singular contact block.
 ※The control unit, contact blocks, LED blocks are sold separately.
 (control unit: bold letters, contact and LED block: regular letters)
 ※The LED color is the same as the control unit.
 ※Connect up to 2 contact blocks. Connect the contact blocks only on the right and left side slots.
 It will not operate if connected to the center slot.

• Dimensions (unit: mm)





	A	B
Singular type	48.5	27.0
Modular type	46.5	25.0

※For panel cut-out dimensions, please refer to page A-82.



Ø22/25 Selector Switches

Type	Appearance	Operating position	Model	Contact block		LED block	
				A contact	B contact	AC/DC voltage	AC voltage
Long shark-head lever, extended (illuminated)		3-position, spring return two-way	S2SRN-L6K□2AD(M)	2	—	1	—
			S2SRN-L6K□2BD(M)	—	2		
			S2SRN-L6K□ABD(M)	1	1		
		3-position, maintained	S2SRN-L8K□2AD(M)	2	—		
			S2SRN-L8K□2BD(M)	—	2		
			S2SRN-L8K□ABD(M)	1	1		
		3-position, spring return from right	S2SRN-LBK□2AD(M)	2	—		
			S2SRN-LBK□2BD(M)	—	2		
			S2SRN-LBK□ABD(M)	1	1		
		3-position, spring return from left	S2SRN-LDK□2AD(M)	2	—		
			S2SRN-LDK□2BD(M)	—	2		
			S2SRN-LDK□ABD(M)	1	1		
		3-position, spring return two-way	S2SRN-L6□2AD(M)	2	—		
			S2SRN-L6□2BD(M)	—	2		
			S2SRN-L6□ABD(M)	1	1		
		3-position, maintained	S2SRN-L8□2AD(M)	2	—		
			S2SRN-L8□2BD(M)	—	2		
			S2SRN-L8□ABD(M)	1	1		
		3-position, spring return from right	S2SRN-LB□2AD(M)	2	—		
			S2SRN-LB□2BD(M)	—	2		
			S2SRN-LB□ABD(M)	1	1		
		3-position, spring return from left	S2SRN-LD□2AD(M)	2	—		
			S2SRN-LD□2BD(M)	—	2		
			S2SRN-LD□ABD(M)	1	1		

□ indicates color: **R**, **B**, **G**, **Y**

※The M in the model name indicates modular type contact block. Models without M are singular contact block.

※The control unit, contact blocks, LED blocks are sold separately.

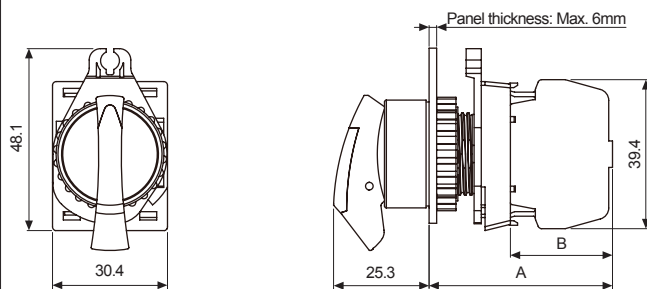
(control unit: bold letters, contact and LED block: regular letters)

※The LED color is the same as the control unit.

※Connect up to 2 contact blocks. Connect the contact blocks only on the right and left side slots. It will not operate if connected to the center slot.

• Dimensions

(unit: mm)



	A	B
Singular type	48.5	27.0
Modular type	46.5	25.0

※For panel cut-out dimensions, please refer to page A-82.

Control Switches

Ø16

Ø22/25

Ø30

□30

Push Button Switches

Round

Square

Rectangular

Selector Switches

Round

Square

Rectangular

Key Selector Switches

Round

Square

Rectangular

Double Push Button Switches

Mushroom-head Push Button Switches

Emergency Switches

Pilot Lights



Accessories

Buzzers

Ø22/25 Panel Cut-out Dimensions

Ø22/25 Panel Cut-out Dimensions

(unit: mm)

Type			A	B	Panel Cut-out Dimensions
Round/Square Push Button Switches (S2PR/S2PRS Series)			33	55	<Mounting hole: Ø25>  <Mounting hole: Ø22> 
Round Selector Switches (S2SR/S2SRN Series)	Short lever		33	55	
	Long lever		55	55	
Round Key Selector Switches (S2KR Series)			33	55	
Double Push Button Switches (S2TR Series)			33	60	
Mushroom-head Push Button Switches (S2BR Series)			33	55	
Emergency Switches (S2ER Series)	D30		33	55	
	D40		55	55	
	D60		80	80	
Pilot Lights (L2RR Series)			33	55	